

MF 1

Perfect for workshop and training applications


MF 1 VP models

- The most widely used milling machine type in the world - with standard pneumatic tool clamping
- infinitely variable spindle speed via hand wheel adjustment
- Larger table with larger travel on X
- TV 1000 automatic table advance on X-axis is included, retrofitting of Y-axis available



MF 1 P

- Speed is changed by shifting the 2-step drive motor transmission, or by selecting the desired gear ratio at the drive belt (4 speeds per gear)
- Automatic table feed, type TV 1000 on X and Y, can easily be retrofitted

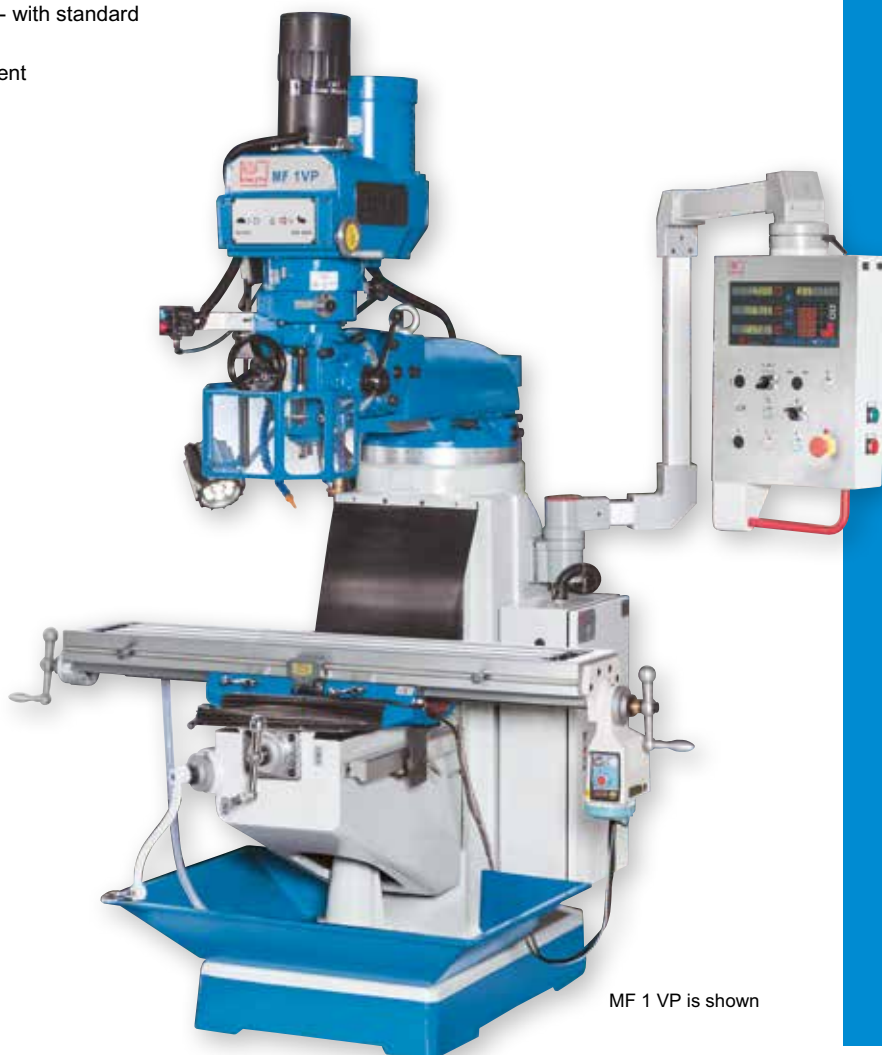

MF 1 VP is shown

Specifications

		MF 1 P	MF 1 VP
Table set up area	mm	1.060x230	1.245x230
Travel X-axis	mm	670	760
Travel Y-axis	mm	290	290
Travel Z-axis	mm	370	370
Spindle speeds	1/min	(16) 80 - 4.500	(2) 60 - 4.200
Spindle mount		ISO 30	ISO 30
Motor rating main drive	kW	2,2	2,25
Weight	kg	1.100	950
Part No.		301219	301215

Standard Equipment

3-axis position indicator, automatic table feed in X direction (TV 1000) (MF 1 VP), pneumatic tool clamping, coolant system, central lubrication, vertical guideway cover, LED work lamp, operating tools, operator manual